

**155 Mb/s, 1310 nm
Multimode, 2 km Distance
2x5 SFF Dual LC Package**



2x5 Small Form Factor (SFF) Transceivers

Description

OptixCom's 2x5 Small Form Factor (SFF) transceiver provides a low cost and compact solution for general transceiver is a high performance data link module compliant with the industry standard of SFF Multi-Source Agreement (MSA). This multimode transceiver is specifically designed with low cost, high performance 1310 nm LED light source. The dual LC connector interface also offers higher port density for system integrators.

The standard 2x5 pluggable package makes it easy for assembly and test. The transceiver operates at 155 Mb/s, and reaches more than 2 km of transmission distance with standard multimode fibers and >11 dB of power budget. This product is RoHS compliant.




Lead-Free

SFF-155LX-DP2K



155 Mb/s, 2²³-1 NRZ Data Eye Pattern

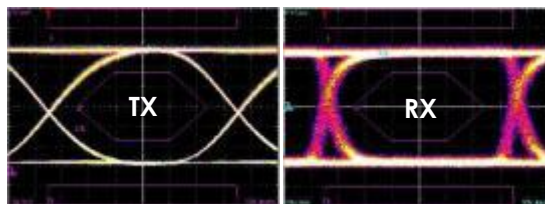

Key Features

- 1310 nm multimode, 155 Mb/s
- >11 dB power budget, 2 km reach
- Duplex LC connector optical interface
- Industry standard 2x5 pluggable package
- DC coupling LVPECL differential I/O logics
- LVPECL Signal detect to monitor optical signals
- Single 3.3V power supply
- -40–85 °C operating temperatures available
- RoHS compliant

Applications

- ✓ FTTH, FTTX, ATM/SONET OC-3, SDH STM-1
- ✓ Fast Ethernet
- ✓ High speed I/O for file server
- ✓ Video over fiber links
- ✓ Media converter
- ✓ Data Communication for SAN and LAN
- ✓ Industrial Control Link
- ✓ Central offices routers and switches
- ✓ Mass storage systems interconnect
- ✓ Computer cluster cross-connect

Ordering Information

Part Number: SFF-155LX-DP2K

Description:
1310 nm 155 Mb/s, Multimode, 2x5 SFF Fiber Optics Transceiver, 2 km reach, 0-70°C

Part Number: SFF-155LX-DP2K-T

Description:
1310 nm 155 Mb/s, multimode, 2x5 SFF Fiber Optics Transceiver, 2 km reach, -40-85°C

Operating Conditions

Parameter	Min.	Typical	Max.	Units
Operate Temperature	0	25	70	°C
- T Transceivers	-40	25	85	°C
Data Rate	---	155	200	Mb/s
Supply Voltage	3.1	3.3	3.5	V
Supply Current	---	200	250	mA

U.S.A. Office: Optix Communications, Inc.

17901 Von Karman Avenue, Suite 600,
Irvine, CA 92614

Tel: (949) 679-5712 Fax: (949) 420-2134

<http://www.OptixCom.com>

<http://www.OpticalTransceiver.com>

Email: Support@OptixCom.com

Germany Office: OptixCom GmbH

Freiherr vom Stein Strasse 19, 60323
Frankfurt am Main, Germany

Tel: +49 (0)69 7953-3646

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units
Storage Temperature	T_{st}	-40	85	°C
Supply Voltage	V_{cc}	-0.5	6.0	V
Input Voltage	V_{IN}	-0.5	V_{cc}	V
Operating Current	I_{op}	---	400	mA
Output Current	I_o	---	50	mA
Soldering Temperature (10 sec. on leads)	T_{sd}	---	260	°C

Transmitter Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Differential Input Voltage ¹	ΔV_i	0.3	---	1.6	V
Differential Input Impedance ²	Z	---	100	---	ohm
Optical Output Power ³	P_o	-20	---	-14	dBm
Optical Wavelength	λ_o	1270	1310	1380	nm
Extinction Ratio	ET	10	---	---	dB
Spectral Width (FWHM)	$\Delta\lambda$	---	---	170	nm
Duty Cycle Distortion	T_{dc}	---	---	0.6	ns
Rise/Fall Time (10% - 90%)	T_r/T_f	---	---	3	ns
Data Dependent Jitter	T_{DJ}	---	---	0.6	ns
Random Jitter	T_{RJ}	---	---	0.6	ns
Data Input Voltage – High	V_{IH}	$V_{cc} - 1.1$	---	$V_{cc} - 0.7$	V
Data Input Voltage - Low	V_{IL}	$V_{cc} - 2.0$	---	$V_{cc} - 1.6$	V

Notes:

1. Module is designed for DC LVPECL coupling. See the design guide for proper termination.
2. Single ended will be 50 ohm for each signal line.
3. Output of coupling optical power into 50/125 or 62.5/125 μ m MMF.
4. Optical eye diagram is compliant with Telcordia GR-253-CORE and ITU-T G-957 standard.

**Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11**



Receiver Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Operating Wavelength	λ_c	1260	---	1610	nm
Receiver Overload	P_{max}	0	---	---	dBm
Receiver Sensitivity ¹	P_I	---	---	-31	dBm
Differential Output Voltage	ΔV_o	0.3	---	1.6	V
Differential Input Impedance ²	Z	---	100	---	Ohm
Optical Return Loss	OL	12	---	---	dB
Rise/Fall Time (10% - 90%)	T_r/T_f	---	---	3	ns
Signal Detect- Asserted	P_{SD+}	---	---	-31	dBm
Signal Detect- Deasserted	P_{SD-}	-45	---	---	dBm
Signal Detect Assert Time	T_{ass}	---	---	100	μ s
Signal Detect Deassert Time	T_{disass}	---	---	100	μ s
Signal Detect Hysteresis	$P_{SD+} - P_{SD-}$	1.0	---	---	dB
Signal Detect Output - Low	V_{SD-}	$V_{CC} - 2.0$	---	$V_{CC} - 1.6$	V
Signal Detect Output - High	V_{SD+}	$V_{CC} - 1.1$	---	$V_{CC} - 0.7$	V
Data Output Voltage - Low	V_{OL}	$V_{CC} - 2.0$	---	$V_{CC} - 1.6$	V
Data Output Voltage - High	V_{OH}	$V_{CC} - 1.1$	---	$V_{CC} - 0.7$	V

Notes:

1. Test at 155 Mb/s, 2²³ - 1 PRBS data pattern, and > 1x10⁻¹⁰ of Bit-Error-Rate (BER).
2. Single ended will be 50 ohm for each signal line.

Class 1 Laser Product
Complies with
21 CFR 1040.10 and 1040.11

