

**100 Gb/s (4x25 Gb/s)
850 nm, Multimode, 100 m
QSFP28 MPO Package**


Description

OptixCom's 100 Gb/s QSFP28 is a 4-lane parallel pluggable fiber optics transceiver designed with advanced 850 nm VCSEL laser arrays and high speed electronics to achieve the optimum performance for optical interconnect applications. It is compliant with 100G Ethernet standard and QSFP28 Multi-Source Agreement (MSA) SFF-8436 for datacom applications.


The transceiver uses an 8-fiber MPO multimode connector interface to transmit and receive 4 lanes of 25 Gb/s optical data respectively. It is hot pluggable in the z-axis with a 38-pin connector. The transceiver has 2-11 dB of power budget and reaches up to 100 meters of transmission distance with OM3 multimode fibers. The product is RoHS compliant. Total power consumption is < 2.5W.



QFP-100GSR4-AT100M

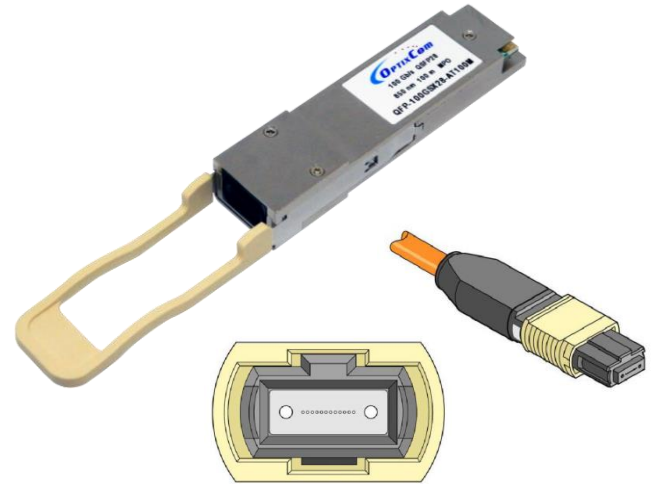

4 x 25 Gb/s Channels, 2³¹-1 NRZ Data Eye Pattern

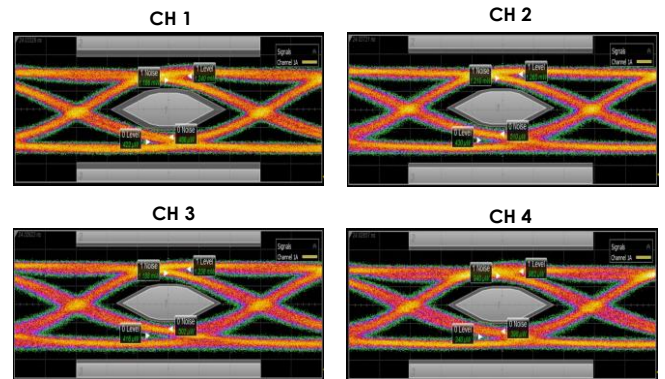

Key Features

- 850 nm multimode, 100 Gb/s data rate
- 4-channel duplex transceiver; 28 Gb/s each lane
- 100 m with OM3 MMF
- 2-12 dB power budget
- Single 8-fiber MPO connector optical interface
- 38-pin Z-axis hot pluggable connector
- Compliant with QSFP+ MSA standard
- Compliant with IEEE 802.3bm, 100GBASE-SR
- Single 3.3V power supply
- RoHS compliant

Applications

- ✓ 100G Fiber Channel and Ethernet
- ✓ InfiniBand 4X SDR DDR QDR
- ✓ Data Communication for SAN and LAN
- ✓ Central offices routers and switches
- ✓ Mass storage systems interconnect
- ✓ Computer cluster cross-connect

Ordering Information

Part Number: QFP-100GSR4-AT100M

Description:

QSFP28, 850 nm 100 Gb/s, multimode MPO fiber optics transceiver, 100 m reach, 0-70°C

Operating Conditions

Parameter	Min.	Typical	Max.	Units
Operate Temperature	0	25	70	°C
Data Rate	103	---	112	Gb/s
Supply Voltage	3.14	3.3	3.46	V
Supply Current	---	---	750	mA

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units
Storage Temperature	T_{st}	-40	85	°C
Supply Voltage	V_{CC}	-0.3	4	V
Input Voltage	V_{IN}	$V_{CC}-0.3$	$V_{CC}+0.3$	V
Relative Humidity	$R.H.$	5	95	%
Output Current	I_o	---	50	mA

Transmitter Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Differential Input Voltage ¹	ΔV_i	0.3	---	1.0	V
Differential Input Impedance ²	Z	---	100	---	ohm
Optical Output Power Per Lane ³	P_o	-8.4	---	2.4	dBm
Spectral Width (rms)	$\Delta\lambda$	---	---	0.6	nm
Transmitter & Dispersion Penalty	TDP	---	---	4.3	dB
Optical Wavelength	λ_o	840	850	860	nm
Extinction Ratio	ET	2	---	---	dB
TX Disable Asserted	P_{OFF}	---	---	-30	dBm
Input Voltage – Logic High	V_{DH}	2.0	---	V_{CC}	V
Input Voltage – Logic Low	V_{DL}	0	---	0.4	V
Reset Initial Assert Time	T_{RSass}	---	---	2	μs
Reset Assert Time	T_{riass}	---	---	2000	ms
Time to Initialize	T_{ini}	---	---	2000	ms
TX Enabled Assert Time	T_{TAss}	---	---	100	ms
TX Disabled Deassert Time	T_{TDis}	---	---	400	μs
TX Fault Assert Time	T_{fxass}	---	---	200	ms
Flag Assert Time	T_{fgass}	---	---	200	ms

Notes:

1. Module is designed for AC coupling. DC voltage will be filtered by internal capacitors.
2. Single ended will be 50 ohm for each signal line.
3. Output of coupling optical power into 50/125 μm MMF.
4. Refer to OptixCom “QSFP Design Reference Guide” for more design details.

Receiver Electro-Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Units
Operating Wavelength	λ_c	840	---	860	nm
Receiver Overload	P_{max}	2.4	---	---	dBm
Receiver Sensitivity ¹	P_I	---	---	-10	dBm
Differential Output Voltage	ΔV_o	0.3	---	0.8	V
Differential Input Impedance ²	Z	---	100	---	Ohm
Optical Return Loss	OL	12	---	---	dB
Rise/Fall Time (20% - 80%)	T_r/T_f	---	---	40	ps
RX Signal Loss – Asserted	P_{SD+}	---	---	-12	dBm
RX Signal Loss – Deasserted	P_{SD-}	-30	---	---	dBm
Output Voltage – Logic High	V_{RL+}	2.0	---	V_{CC}	V
Output Voltage – Logic Low	V_{RL-}	0	---	0.4	V
RX LOS Assert Time	T_{RL+}	---	---	100	ms
RX LOS Deassert Time	T_{RL-}	---	---	100	ms
ModSelL Assert Time	$T_{ModSelAss}$	---	---	100	μ s
ModSelL Deassert Time	$T_{ModSelDea}$	---	---	100	μ s

Notes:

1. Test at 25 Gb/s, 2³¹ – 1 PRBS data pattern, and > 1x10⁻¹² of Bit-Error-Rate (BER).
2. Single ended will be 50 ohm for each signal line.
3. Refer to OptixCom "QSFP Design Reference Guide" for more design details.

Typical Transmission Distance for Multimode Fibers @ 850 nm

Data Rate	Fiber Type	Distance (m)	Data Rate	Fiber Type	Distance (m)
10 Gb/s	OM4: 50 μ m, 3500 MHz*km	400	25 Gb/s	OM4: 50 μ m, 3500 MHz*km	150
	OM3: 50 μ m, 1500 MHz*km	300		OM3: 50 μ m, 1500 MHz*km	100
	OM1: 50 μ m, 500 MHz*km	82		OM1: 50 μ m, 500 MHz*km	---
	OM1: 62.5 μ m, 200 MHz*km	33		OM1: 62.5 μ m, 200 MHz*km	---